

## NHR115E6 Brushless DC/AC Servomotors

### Technical Data

Parameter	Unit	-130	-88	-64	-44
<b>General</b>					
Voltage Gradient No Load Line-Line	Volts/1000RPM	130	88	64	44
Max. Motor EMF Line-Line	Volts	700	530	380	260
Max. Speed	RPM	5400	6000	6000	6000
<b>Continuous Stall Torque TENV (110K) <sup>3</sup></b>	<b>Nm</b>	<b>9.8</b>	<b>9.8</b>	<b>9.8</b>	<b>9.8</b>
Continuous Stall Torque when fitted to Heatsink (Size 300 x 300 x 12 mm)	Nm	10.8	10.8	10.8	10.8
Peak Stall Torque	Nm	33	33	33	33
<b>Continuous Stall Current rms <sup>3</sup></b>	<b>Amps</b>	<b>6.4</b>	<b>9.5</b>	<b>13.1</b>	<b>19</b>
Rotor Polar Moment of Inertia	kgcm <sup>2</sup>	7.5	7.5	7.5	7.5
<b>Maximum Current (Peak)</b>	<b>Amp</b>	<b>36</b>	<b>53</b>	<b>73</b>	<b>106</b>
Cogging Torque	Nm	0.24	0.24	0.24	0.24
Torque Constant K <sub>T</sub> rms <sup>1,2</sup>	Nm/Amp	1.53	1.02	0.75	0.51


### Winding

Resistance Line-Line <sup>1</sup>	Ohms	2.1	1.01	0.49	0.23
Inductance Line-Line	Millihenrys	18	8.1	4.3	2
Insulation Class		F	F	F	F
Max. Ambient Temperature	°C	40	40	40	40
Thermal Time Constant	Minutes	55	55	55	55
Thermal Resistance	°C/Watt	0.61	0.61	0.61	0.61
Static Friction Torque	Nm	0.066	0.066	0.066	0.066
Motor Weight	kg	11.4	11.4	11.4	11.4

Tolerance All data is subject to a tolerance of ± 10% (except motor 'Voltage Gradient' and K<sub>T</sub> which are to +15%/-5%).

- At 25°C.
- Note that K<sub>T</sub> is shown as a combined value for all **three phases**.
- The temperature rise Δ T on the windings is 110K and applies to all continuous torque values. The maximum ambient temperature is 40°C and therefore the temperature on the windings should not be more than 150°C. A value higher than 150°C would exceed the class F insulation temperature specification.

NHR115E6 on 300V

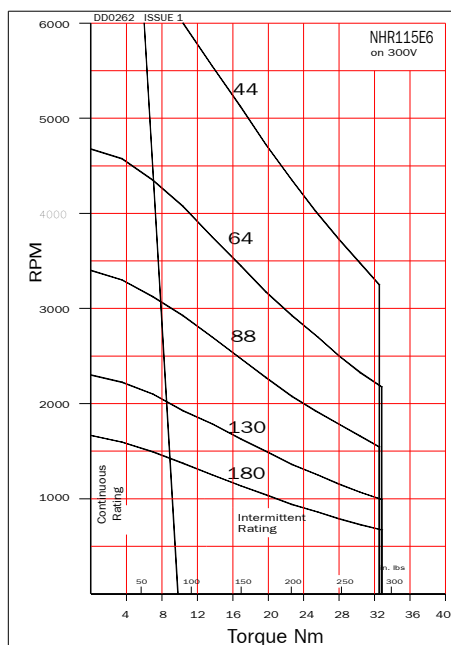

NHR115E6 on 560V

